




5 ton Electric Chain Hoist w/ Power Trolley 1 Speed 380V 3Ø 50HZ

Características Esenciales

- 3 Años de Garantía, Servicio y Atención al Cliente en Chile

Especificaciones Técnicas

Power Cord Length and Phase Order	3 ft / Red L1, White L2 and Black L3, Green ground	Pendant Control Yes No	Yes
Potencia Total Watts	3750	IEC Pendant Control Protection	IP66
Capacidad de Carga	5 ton	Pendant Control Emergency Stop	Yes
Altura de Izaje Estandar (Customizable)	30 ft / 9 m	Pendant Control total Length	27 ft
Velocidad /min	10.63 ft @60Hz 2.70 mt @50Hz	Hoist Motor Power in KW	3
Numero de Velocidades	1 Speed	Hoist Motor Brake Type and DC Voltage	DC170V
Voltaje	3 Phase 380V 50Hz	Overload Protection	Overload Motor Clutch
Clase de Servicio	H4/M5/2m/Class D	Hour Meter	Internal Working Hour Meter
Protección IEC Motor	IP55	Brake rectifiers-half-wave	PWRX-BKTF-HW
Control	Pendant Control IP66	Hoist Motor Insulation Grade	F
Voltaje del Control	24V	Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 20A
Tipo Transmisión / Reductor	Spur gearbox	Optional Load Chain Brand & Country of Origin	FEC Japan
Tipo de Cadena	G100 Nickel	Reducer Lubrication Type	Oil
Dimensiones de la Cadena	11.2 mm	Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments
Caidas de Cadena	2	Trolley Motor Brake Type and DC Voltage	DC170V
Longitud de cadena	60	Trolley Motor Insulation Grade	F
Humedad	20%~90%	Trolley Contactors Amps	40A
Temperatura	-4 ~ 104° F / -20 ~ 40° C	Trolley Contactors Brand	Schneider
Potencia del Trolley	750	Trolley Contactors Coil Voltage	24 V
Velocidad del Trolley /min	43.30 ft @60Hz 11 mt @50Hz	Trolley Wheel Diameter	139
Cantidad de Velocidades	1	Trolley Wheel Material	No. 45 steel
Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-36	Trolley Minimum Turn Radius	1.8 m / 5.9 ft
Garantía	3 Year	Trolley Beam Range	3.9" to 7"
Hoist Contactors Amps	25A	Trolley Beam Extension Kit	up to 12"
Hoist Contactor Brand	Schneider	Load Chain weight per foot [lbs]	1.83
Hoist Contactor Coil Voltage	24 V	1st Package Type	Wood Crate
IEC Hoist IP Protection	IP55	2nd Package Type	Wood Crate

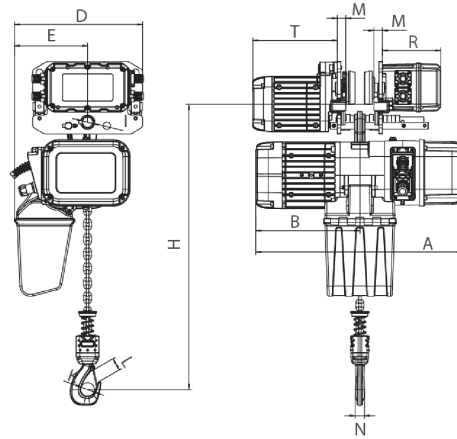

Rated load (t)	Type	Dimension (mm)													
		Minimum distance from the bottom of the track of the bottom to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R	
1	PWRXT1-01	473	440	3500-5500	285	210	20	105	140						
2	PWRXT2-01	516	590		276	368	210	31	24	25	42	32	242	167	
3	PWRXT3-01	600	681		350	422	264	36	28	35	52	42	242	167	
5	PWRXT5-02	645	681		350	478	307	43	30	34	59	48	242	167	

Peso & Dimensiones

H Altura Muerta	31.89
W Ancho	16.54
A Altura Total	26.57
J Boca Gancho	2.36
D Depth	27.36
Peso Total (sin cable o cadena)	246.46
Peso Total	616 lbs / 280 Kg

Detalles del Empaque

Paquete 1 Peso Neto	294.8 lbs / 134 Kg
Paquete 2 Peso Bruto	121 lbs / 55 Kg
Paquete 1 Peso Bruto	495 lbs / 225 Kg
Paquete 2 Profundidad	11 in / 27.94 cm
Paquete 1 Profundidad	30 in / 76.2 cm
Paquete 2 Ancho	14 in / 35.56 cm
Paquete 1 Ancho	20 in / 50.8 cm
Paquete 2 Altura	23 in / 58.42 cm
Paquete 1 Altura	31 in / 78.74 cm
Hoist Contactor Model	LC1D25B7C
Paquete 2 Peso Neto	111.1 lbs / 50 Kg
Trolley Contactors Model	LC1D12B7C

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso