




5 ton Electric Chain Hoist w/ Power Trolley 2 Speed 380V 3 ϕ 1/2 50HZ

Características Esenciales

- 3 Años de Garantía, Servicio y Atención al Cliente en Chile

Especificaciones Técnicas

Capacidad de Carga	5 ton	IEC Hoist IP Protection	IP55
Potencia Total Watts	3750	Pendant Control Yes No	Yes
Power Cord Length and Phase Order	3 ft / Red L1, White L2 and Black L3, Green ground	IEC Pendant Control Protection	IP66
Altura de Izaje Estandar (Customizable)	30 ft / 9 m	Pendant Control Emergency Stop	Yes
Velocidad /min	1 st speed : (3.1 ft @60Hz - 0.8 mt @50Hz) / 2 nd speed : (10.6 ft @60Hz - 2.7 mt @50Hz)	Pendant Control total Length	27 ft
Numero de Velocidades	2 Speed	Hoist Motor Power in KW	3
Voltaje	3 Phase 380V 50Hz	Hoist Motor Brake Type and DC Voltage	DC170V
Clase de Servicio	H4/M5/2m/Class D	Overload Protection	Overload Motor Clutch
Protección IEC Motor	IP55	Hour Meter	Internal Working Hour Meter
Control	Pendant Control IP66	Brake rectifiers-half-wave	PWRX-BKTF-HW
Voltaje del Control	24V	Hoist Motor Insulation Grade	F
Tipo Transmisión / Reductor	Spur gearbox	Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 20A
Tipo de Cadena	G100 Nickel	Optional Load Chain Brand & Country of Origin	FEC Japan
Dimensiones de la Cadena	11.2 mm	Reducer Lubrication Type	Oil
Caidas de Cadena	2	Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments
Longitud de cadena	60	Trolley Motor Brake Type and DC Voltage	DC170V
Humedad	20%~90%	Trolley Motor Insulation Grade	F
Temperatura	-4 ~ 104° F / -20 ~ 40° C	Trolley Contactors Amps	40A
Potencia del Trolley	750	Trolley Contactors Brand	Schneider
Velocidad del Trolley /min	14.17~43.30 ft @60Hz 3.6~11 mt @50Hz	Trolley Contactors Coil Voltage	24 V
Cantidad de Velocidades	2	Trolley Wheel Diameter	139
Rango de ancho de la Viga	3.9" to 7"	Trolley Wheel Material	No. 45 steel
Radio Minimo de Giro	1.8	Trolley Minimum Turn Radius	1.8 m / 5.9 ft
Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-36	Trolley Beam Range	3.9" to 7"
Garantía	3 Year	Trolley Beam Extension Kit	up to 12"
Hoist Contactors Amps	25A	Load Chain weight per foot [lbs]	1.83
Hoist Contactor Brand	Schneider	1st Package Type	Wood Crate
Hoist Contactor Coil Voltage	24 V	2nd Package Type	Wood Crate

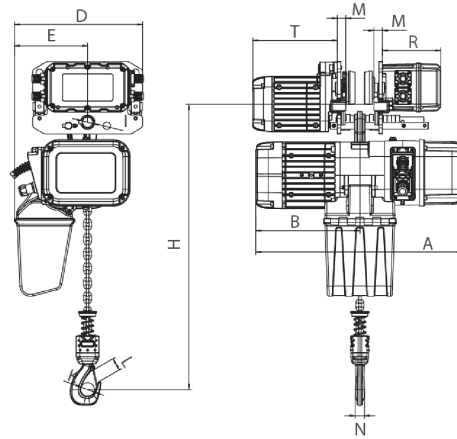

Rated load (t)	Type	Dimension (mm)													
		Minimum distance from the bottom of the track of the bottom to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R	
1	PWRXT1-01	473	440	3500-5500	285	210	20	105	140						
2	PWRXT2-01	516	590		276	368	210	31	24	25	42	32	242	167	
3	PWRXT3-01	600	681		350	422	264	36	28	35	52	42	242	167	
5	PWRXT5-02	645	681		350	478	307	43	30	34	59	48	242	167	

Peso & Dimensiones

H Altura Muerta	31.89
W Ancho	19.69
A Altura Total	31.89
J Boca Gancho	2.36
D Depth	26.81
Peso Total (sin cable o cadena)	246.46
Peso Total	682 lbs / 310 Kg

Detalles del Empaque

Paquete 1 Peso Neto	294.8 lbs / 134 Kg
Paquete 2 Peso Bruto	187 lbs / 85 Kg
Paquete 1 Peso Bruto	495 lbs / 225 Kg
Paquete 2 Profundidad	11 in / 27.94 cm
Paquete 1 Profundidad	30 in / 76.2 cm
Paquete 2 Ancho	14 in / 35.56 cm
Paquete 1 Ancho	20 in / 50.8 cm
Paquete 2 Altura	23 in / 58.42 cm
Paquete 1 Altura	31 in / 78.74 cm
Hoist Contactor Model	LC1D25B7C / LC1D258B7C
Paquete 2 Peso Neto	172.7 lbs / 78 Kg
Trolley Contactors Model	LC1D12B7C / LC1D128B7C

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso